



GSAN[®]

POINT OF SALE SYSTEM




Your Reliable POS Solution Provider

GSAN[®]

HUNAN KINGHE COMPUTER TECHNOLOGY CO., LTD.

Address: Kinghe Science Park, Yutang Town,
Xiangxiang City, Hunan Province, China
E-mail: 87506970@163.com

2024-02(35)

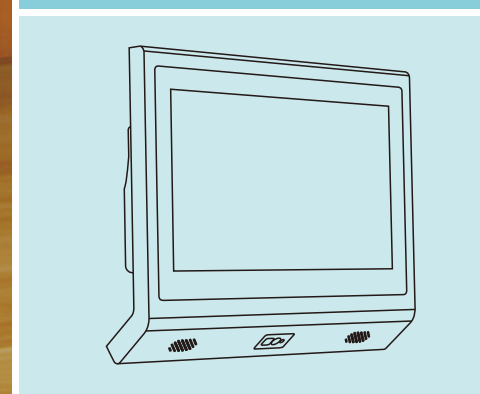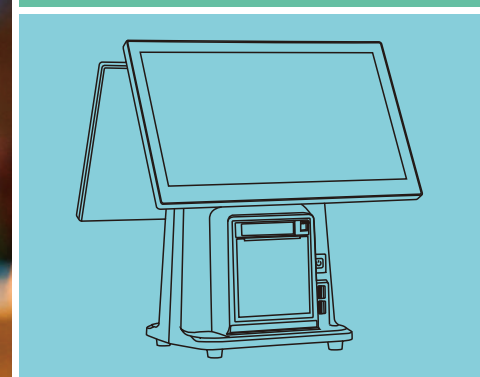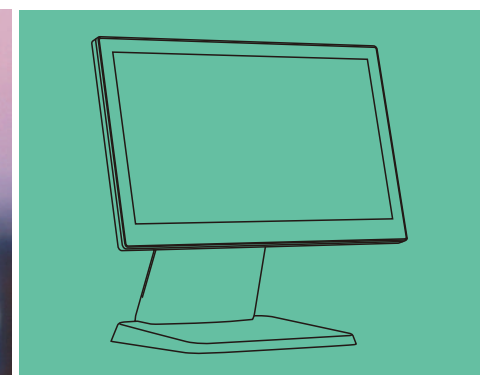

Company Profile



HUNAN KINGHE COMPUTER TECHNOLOGY CO., LTD located in Yutang town, Xiangxiang city, Hunan province, with an area of more than 33333mm, is a high-tech and AAA creditable and contract keeping enterprise with R&D, production, management, sales and service together. We're mainly engaged in POS system, cash drawer, touch monitor, POS receipt/barcode printer, barcode scanner, magnetic card reader&writer and other related products . Which are widely used in retail, Food and Beverages, supermarket, specialty store, entertainment industry and other industries. Besides, we have passed the quality management system certification ISO9001 and ISO14001 and our products have CCC, FCC, CE, RoHs certification.

The company has established a complete production and manufacturing base and specialized assembly line, be equipped with full range of workshops like molds, injection molding, stamping, automatic spraying and assembling, advanced design concept teams, and strict and standard management, to ensure an excellent product fabrication process and stable quality. The annual production capacity of products keeps in the forefront of the same industry. What's more, we have provided perfect OEM (ODM) services for many customers. Nowadays, we have established our own perfect sales and service networks in

Guangzhou, Hangzhou, Nanjing, Zhengzhou, Chengdu and some other cities. Meanwhile, we are developing our foreign trade business vigorously with markets spreading all over Europe, the Middle East, South Africa, Southeast Asia, South America and so on.

KINGHE will continue to devote to the POS system industry with full enthusiasm to create a better tomorrow with our clients together.



96,000 units
Annual manufacturing capacity





8,000 units
Monthly manufacturing capacity



SMART QMS
System for efficient management of assembly line




CATALOGUE

15" Touch POS System	03
GS-A2 Touch POS System	04
GS-T3 Touch POS System	05
GS-T5 Touch POS System	06
GS-A5 Touch POS System	07
GS-A6 Touch POS System	08
GS-3065 Touch POS System	09
GS-3066 Touch POS System	10
GS-3061 Touch POS System	11
GS-T2 Touch POS System	12
GS-T7 Touch POS System	13
GS-3068 Touch POS System	14
GS-Q1 Self-service Touch POS System	15
GS-X3 Touch POS System	16
GS-X2 Touch POS System	17
GS-X4 Touch Price Checker	18
GS-X1 Touch Price Checker	19
Industrial Touch PC	20
All In One Desktop PC	21
ACS-15 Electronic Price Computing Scale	22
Smart Cash Register	23
MINI PC	24
Cash drawer	26
POS RECEIPT PRINTERS	32
Electronic scale	37
Barcode Scanner	37
Monitor	40
Customers display	43
Keyboard	44

15" Touch POS System

SPECIFICATIONS


MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15" LCD Backlight Display
Resolution	1024*768
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1-2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	345mm(w)x206mm(H)x330mm(D)
Net Weight	kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	9.7" LCD screen, Resolution: 1024*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

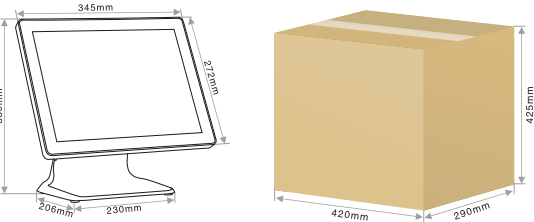

FEATURE



Tablet-like Touch Screen 100% Aluminum Housing

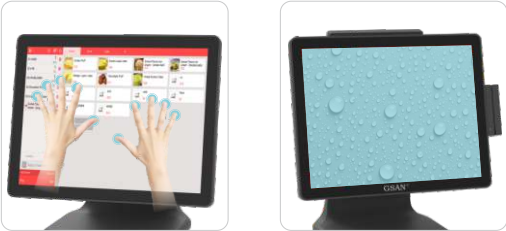

Capacitive multi-point touch panel Dust-proof and anti-corrosion design




Customer display plug and play magcard reader plug and play

GS-A2 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15" LCD Backlight Display
Resolution	1024*768
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1-2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	355mm(w)x206mm(H)x345mm(D)
Net Weight	5.7kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	9.7" LCD screen, Resolution: 1024*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

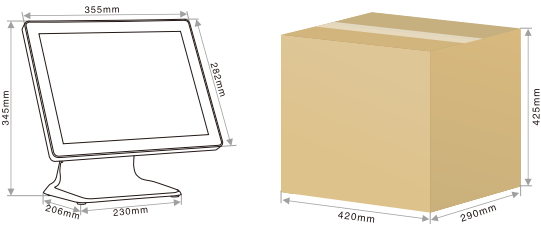

FEATURE



Tablet-like Touch Screen



100% Aluminum Housing



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display plug and play




magcard reader plug and play

GS-T3 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15.6" LCD Backlight Display
Resolution	1366*768 / 1920*1080
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4/5 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1-2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	380mm(w)x208mm(H)x315mm(D)
Net Weight	4.0kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	9.7" LCD screen, Resolution: 1024*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

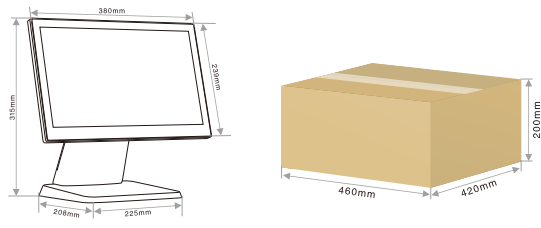

FEATURE



Tablet-like Touch Screen



Split metal base




Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display




Adjustable angle

GS-T5 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15" LCD Backlight Display
Resolution	1024*768
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1-2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	355mm(w)x206mm(H)x345mm(D)
Net Weight	4.7kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	9.7" LCD screen, Resolution: 1024*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

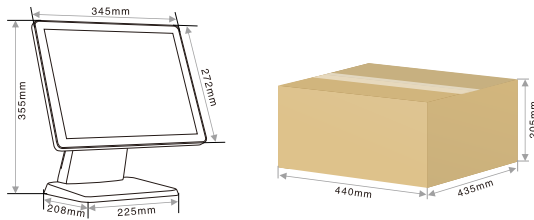

FEATURE



Tablet-like Touch Screen



Folding base




Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display plug and play




magcard reader plug and play

GS-A5 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15.6" LCD Backlight Display
Resolution	1366*768
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1-2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	390mm(w)x208mm(H)x330mm(D)
Net Weight	5.7kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	9.7" LCD screen, Resolution: 1024*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

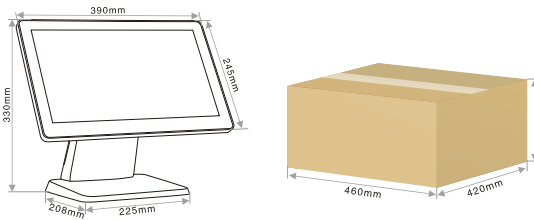


FEATURE



Tablet-like Touch Screen



Split metal base




Capacitive multi-point touch panel



Customer display



Customer display




magcard reader plug and play

GS-A6 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	18.5" LCD Backlight Display
Resolution	1366*768
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1 Serial port
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input:110V~240V 50/63Hz 2A, Output:12V DC 8A 96W MAX
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	450mm(w)x175mm(H)x360mm(D)
Net Weight	6.0kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	11.6"/15.6" LCD screen, Resolution: 1366*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	-
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

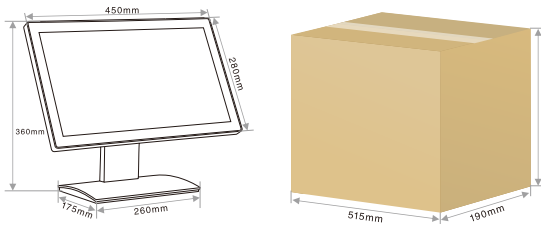

FEATURE



Tablet-like Touch Screen



100% Aluminum Housing



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display plug and play




Adjustable angle

GS-3065 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15.6" LCD Backlight Display
Resolution	1366*768
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	6 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1~2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	1 RJ11
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	380mm(w)x230mm(H)x418mm(D)
Net Weight	5.7kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	11.6" / 15.6" LCD screen, Resolution: 1366*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
printer	Built-in 80mm thermal printer (Optional)
Camera	External camera (Optional)

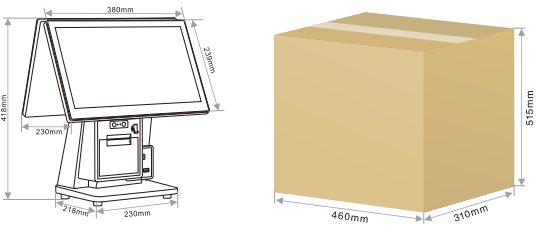

FEATURE



Tablet-like Touch Screen



Built-in 80mm thermal printer



Capacitive multi-point touch panel



External camera



Customer display




magcard reader

GS-3066 Touch POS System



SPECIFICATIONS


MODEL NUMBER	15" Touch POS System	
SYSTEM		
processor	Intel Celeron J6412 Quad-Core, up to 2.60 GHz	
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor	
Memory	4G / 8G , DDR3 / DDR4	
Storage	64G / 128G / 256G / 512G SSD	
OS	Win 10/11	
DISPLAY		
Type	15.6" LCD Backlight Display	
Resolution	1366*768 / 1920*1080	
Aspect Ratio	16:9	
Brightness	300 nits	
Touchscreen	Projective Capacitive Touch Screen	
INTERFACE		
USB	6 USB ports	
LAN	1 LAN port	
Display	1 VGA port	
Serial	1~2 Serial ports	
Audio	1 Audio output 1 Audio input (MIC)	
Cash Drawer	1 RJ11	
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A	
PHYSICAL & ENVIRONMENTAL		
Operationg Temperature	Operating 0~50°	
Storage Temperature	Storage -20° ~60°	
Cooling	Fanless/With CPU Fan	
Dimensions	380mm(w)x288mm(H)x410mm(D)	
Net Weight	5.7kg	
Color	Black, White	
OPTIONS & PERIPHERALS		
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)	
2nd display	11.6" / 15.6" LCD screen, Resolution: 1366*768 (Optional)	
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)	
MSR	Track 1+2+3 (Optional)	
Wifi	Mini PCIe for Wireless LAN (Optional)	
Bluetooth	Bluetooth 4.0 Protocol (Optional)	
Speaker	1*4Ω *2W Speaker (Optional)	
printer	Built-in 58/80mm thermal printer (Optional)	
Camera	External camera (Optional)	
Barcode Scanner	Built-in Barcode Scanner (Optional)	



FEATURE



Tablet-like Touch Screen



Built-in 80mm thermal printer



Capacitive multi-point touch panel



Built-in camera



Customer display plug and play




Built-in Barcode Scanner

GS-3061 Touch POS System



SPECIFICATIONS


MODEL NUMBER	15" Touch POS System	
SYSTEM		
processor	Intel Celeron J6412 Quad-Core, up to 2.60 GHz	
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor	
Memory	4G / 8G , DDR3 / DDR4	
Storage	64G / 128G / 256G / 512G SSD	
OS	Win 10/11	
DISPLAY		
Type	15.6" LCD Backlight Display	15" Capacitive touch panel
Resolution	1366*768 / 1920*1080	1024*768
Aspect Ratio	16:9	4:3
Brightness	300 nits	
Touchscreen	Projective Capacitive Touch Screen	
INTERFACE		
USB	6 USB ports	
LAN	1 LAN port	
Display	1 VGA port	
Serial	1-2 Serial ports	
Audio	1 Audio output 1 Audio input (MIC)	
Cash Drawer	1 RJ11	
Power DC-IN	Input AC 100-240V/50-60hz, Output DC 12V/5A	
PHYSICAL & ENVIRONMENTAL		
Operating Temperature	Operating 0-50°	
Storage Temperature	Storage -20° ~60°	
Cooling	Fanless/With CPU Fan	
Dimensions	380mm(w)x230mm(H)x418mm(D)	
Net Weight	5.7kg	
Color	Black, White	
OPTIONS & PERIPHERALS		
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)	
2nd display	11.6" / 15.6" LCD screen, Resolution: 1366*768 /	
	15" LCD screen, Resolution: 1024*768 (Optional)	
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)	
Wifi	Mini PCIe for Wireless LAN (Optional)	
Bluetooth	Bluetooth 4.0 Protocol (Optional)	
Speaker	1*4Ω *2W Speaker (Optional)	
printer	58mm / 80mm embedded thermal printer; speed: 230mm/s; thermal paper: 80*80mm	



FEATURE



Tablet-like Touch Screen



Built-in 80mm thermal printer



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display





Customer display

GS-T2 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	15" LCD Backlight Display
Resolution	1024*768
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4/5 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	–
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	352mm(w)x206mm(H)x380mm(D)
Net Weight	5.5kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	–
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)



FEATURE



Tablet-like Touch Screen



Cables are routed inside the base



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display





magcard reader

GS-T7 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	17.1" LCD Backlight Display
Resolution	1440*900
Aspect Ratio	16:10
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	6 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1~2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	–
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	405mm(w)x208mm(H)x358mm(D)
Net Weight	4.1kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	11.6" LCD screen, Resolution: 1366*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)



FEATURE



Tablet-like Touch Screen



Split metal base




Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display




Adjustable angle

GS-3068 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	17" LCD Backlight Display
Resolution	1280*1024
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4-6 USB ports
LAN	1 LAN port
Display	1 VGA port
Serial	1 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	352mm(w)x206mm(H)x380mm(D)
Net Weight	6.8kg
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	-
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)

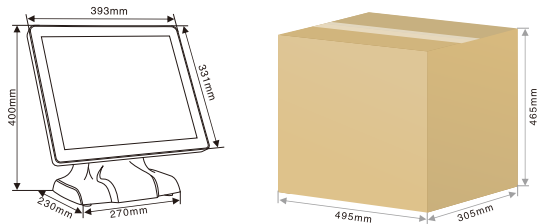

FEATURE



Tablet-like Touch Screen



Simple design,
exquisite appearance



Capacitive multi-point
touch panel



Dust-proof and anti-
corrosion design



Customer display



magcard reader


GS-Q1 Self-service Touch POS System

- ◆ Built-in Thermal Receipt Printer 80mm
- ◆ Built-in Barcode Scanner
- ◆ Support 15.6" /21.5"/27"/32" capacitive touch

SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	Intel Celeron J4125 Quad-Core, up to 2.70 GHz
	Intel Celeron J6412 Quad-Core, up to 2.60 GHz
	Intel Core i3/i5 4/5/6/8/10/11/12th Gen Processor
Memory	4G / 8G , DDR3 / DDR4
Storage	64G / 128G / 256G / 512G SSD
OS	Win 10/11
DISPLAY	
Type	21.5" " LCD Backlight Display
Resolution	1920*1080
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	2 USB ports
LAN	1 LAN port
Display	-
Serial	1 Serial ports
Audio	-
Cash Drawer	-
Power DC-IN	Input AC 100~240V/50-60hz, Output DC 12V/8A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	330mm(w)x82mm(H)x734mm(D)
Net Weight	kg
Color	White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
printer	Built-in 58/80mm thermal printer (Optional)
Camera	External camera (Optional)
Barcode Scanner	1D / 2D scanner (Optional)
Wall Mount	support (Optional)

FEATURE

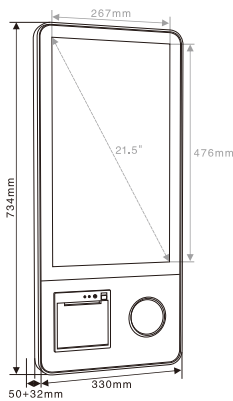

With Metal Pedestal Stand



Wall-mounted





Wall-mounted

GS-X3 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	RK3566 RK3568
Memory	2G / 4G
Storage	32G / 64G
OS	Android 11.0
DISPLAY	
Type	15.6" LCD Backlight Display
Resolution	1366*768
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 HDMI port
Serial	1~2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	–
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operationg Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	380mm(w)x208mm(H)x315mm(D)
Net Weight	4.0kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	11.6" LCD screen Resolution: 1366*768 (Optional)
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	Track 1+2+3 (Optional)
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)



FEATURE



Tablet-like Touch Screen



Split metal base



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display





Customer display

GS-X2 Touch POS System



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System
SYSTEM	
processor	RK3566 RK3568
Memory	2G / 4G
Storage	32G / 64G
OS	Android 11.0
DISPLAY	
Type	14.1" LCD Backlight Display
Resolution	1366*768
Aspect Ratio	16:9
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4 USB ports
LAN	1 LAN port
Display	1 HDMI port
Serial	1~2 Serial ports
Audio	1 Audio output 1 Audio input (MIC)
Cash Drawer	–
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A
PHYSICAL & ENVIRONMENTAL	
Operationg Temperature	Operating 0~50°
Storage Temperature	Storage -20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	349mm(w)x208mm(H)x330mm(D)
Net Weight	3.8kg
Color	Black, White
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)
2nd display	–
VFD	VFD customer display with 2 lines, 40 digits/LED 8N, 8 digits (Optional)
MSR	–
Wifi	Mini PCIe for Wireless LAN (Optional)
Bluetooth	Bluetooth 4.0 Protocol (Optional)
Speaker	1*4Ω *2W Speaker (Optional)
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)



FEATURE



Tablet-like Touch Screen



Split metal base



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Customer display




Adjustable angle

GS-X4 Touch Price Checker



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System	
SYSTEM		
processor	Intel i3	RK3566
		RK3568
Memory	4G DDR3	2G / 4G
Storage	64G / 128G / 256G / 512G SSD	32G / 64G
OS	Win 10/11	Android 11.0
DISPLAY		
Type	11.6" LCD Backlight Display	
Resolution	1366*768	
Aspect Ratio	16:9	
Brightness	300 nits	
Touchscreen	Projective Capacitive Touch Screen	
INTERFACE		
USB	4 USB ports	
LAN	1 LAN port	
Display	-	
Serial	1 Serial ports	
Audio	-	
Cash Drawer	-	
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A	
PHYSICAL & ENVIRONMENTAL		
Operationg Temperature	Operating 0~50°	
Storage Temperature	Storage -20° ~60°	
Cooling	Fanless/With CPU Fan	
Dimensions	310mm(w)x56mm(H)x250mm(D)	
Net Weight	2.5kg	
Color	Black	
OPTIONS & PERIPHERALS		
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)	
2nd display	-	
VFD	-	
Scanner	Barcode scanner	
Wifi	5G / 2.4GHz (Optional)	
Bluetooth	Bluetooth 4.0 Protocol (Optional)	
Camera	Built-in camera (Optional)	
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)	

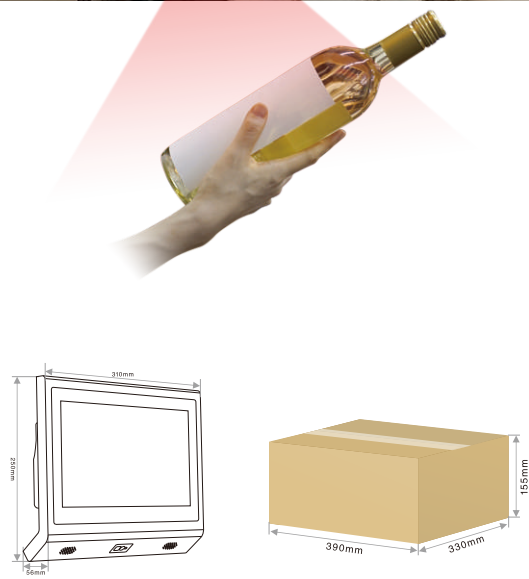

FEATURE




GS-X1 Touch Price Checker



SPECIFICATIONS

MODEL NUMBER	15" Touch POS System	
SYSTEM		
processor	Intel J1900	RK3566
		RK3568
Memory	4G DDR3	2G / 4G
Storage	64G / 128G / 256G / 512G SSD	32G / 64G
OS	Win 10/11	Android 11.0
DISPLAY		
Type	10.1" LCD Backlight Display	
Resolution	1280*800	
Aspect Ratio	16:9	
Brightness	300 nits	
Touchscreen	Projective Capacitive Touch Screen	
INTERFACE		
USB	6 USB ports	
LAN	1 LAN port	
Display	-	
Serial	1 Serial ports	
Audio	-	
Cash Drawer	-	
Power DC-IN	Input AC 100~240V/50~60hz, Output DC 12V/5A	
PHYSICAL & ENVIRONMENTAL		
Operationg Temperature	Operating 0~50°	
Storage Temperature	Storage -20° ~60°	
Cooling	Fanless/With CPU Fan	
Dimensions	310mm(w)x56mm(H)x250mm(D)	
Net Weight	1.5kg	
Color	Black	
OPTIONS & PERIPHERALS		
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)	
2nd display	-	
VFD	-	
Scanner	Barcode scanner	
Wifi	5G / 2.4GHz (Optional)	
Bluetooth	Bluetooth 4.0 Protocol (Optional)	
Camera	-	
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)	

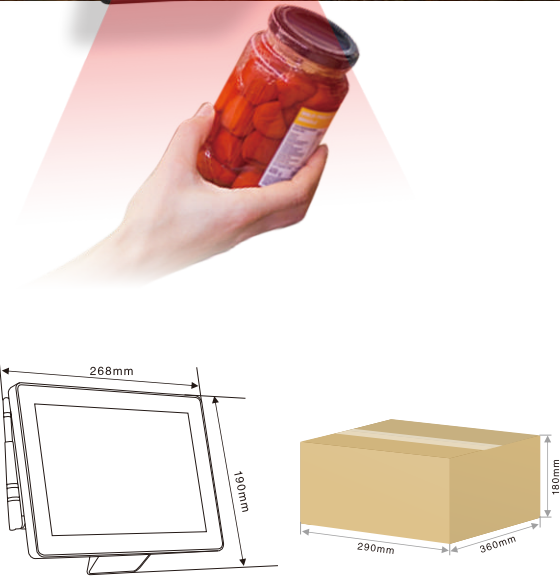

FEATURE




Industrial Touch PC



SPECIFICATIONS

MODEL NUMBER		15" Touch POS System	
SYSTEM			
processor	Intel Sky Lake-U	RK3566	
	Kaby Lake-U	RK3568	
	Core I3 I5 I7 processor		
Memory	4G / 8G , DDR3 / DDR4	2G / 4G	
Storage	64G / 128G / 256G / 512G SSD	32G / 64G	
OS	Win 10/11	Android 11.0	
DISPLAY			
Type	12" / 15" / 17" / 19" / 21.5" Capacitive touch LED screen		
Resolution	1280*1024		
Aspect Ratio	4:3		
Brightness	300 nits		
Touchscreen	Projective Capacitive Touch Screen		
INTERFACE			
USB	4 USB ports		
LAN	1 LAN port		
Display	1 VGA port		
HDMI	1 HDMI port		
Audio	1 Audio output 1 Audio input (MIC)		
Cash Drawer	-		
Power DC-IN	Input:110V~240V 50/63Hz 2A, Output:12V DC 5A 60W		
PHYSICAL & ENVIRONMENTAL			
Operationg Temperature	Operating 0~50°		
Storage Temperature	Storage -20° ~60°		
Cooling	Fanless/With CPU Fan		
Dimensions	-		
Net Weight	-		
Color	Black		
OPTIONS & PERIPHERALS			
Additional Hard Disk	2.5" sata 3.0 SSD or 500GB, 1TB HDD (Optional)		
2nd display	-		
VFD	-		
MSR	-		
Wifi	Mini PCIe for Wireless LAN (Optional)		
Bluetooth	Bluetooth 4.0 Protocol (Optional)		
Speaker	-		
Wall Mount	VESA 75*75mm (Available for Single Display Only) (Optional)		

FEATURE



Tablet-like Touch Screen



Aluminum Housing



Capacitive multi-point touch panel



Dust-proof and anti-corrosion design



Wall mounting bracket



Wifi

All In One Desktop PC




Screen Size	18.5" / 22" / 24"
Display resolution	1920x1080
SSD / HDD	1*M.2 SATA SSD / 1*M SATA SSD
CPU	Intel I3 / I5 / I7
Memory	4G / 8G / 16G / 32G
Hard Disk	256G / 500G / 1TB / 2TB
Power	DC 12V 5A
Interface	4*USB, 1*LAN, 1*HDMI, 1*VGA, 1*Audio input,1*Audio output
Optional	WIFI+Bluetooth / Speaker






ACS-15 15kg Precision Electronic Price Computing Scale

- ◆ Display Type: LED
- ◆ Maximum Load: 15kg
- ◆ Minimum value: 100g
- ◆ Verification scale interval: 5g
- ◆ Color: Dark blue body scale
- ◆ Pan: Stainless steel
- ◆ Keyboard: 24 Keys

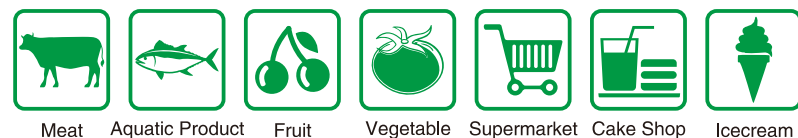

Smart Cash Register



Product configuration

Printer	58mm Thermal Printer, 90mm/s Printing Speed
Operator Display	2.8 inch TFT LCD
Customer Display	LED8N
Keyboard	48 Keys
Communication	USB (WiFi, U-DISK optional)
Interfaces	2xRS232, 1xPS2, 1xUSB
Departments	18(Directdepartment)/36(Shift department)/200(Define)
PLUS	Max10000
VIP	1000
Data Storage	50000
Receipt Title	8 Lines
Money Detector Function	UV Light (optional)
Cash Drawer	335 3-Position Lock, Metal Money Clip
Power	AC 100~240V/50~60Hz, DC 12V/3A



MODEL *MINI PC*

CPU	Intel Alder Lake-N N100 / N95 / I3-N305 processor
Memory	4G / 8G / 16G DDR4
Hard Disk	M.2 32G / 64G / 128G / 256G / 512G SSD
Interface	1*Power switch, 1*TYPE-C, 3*USB3.0 , 2*COM ,1*Audio , 2*USB2.0 ; 2*LAN; 1*DP; 2*HDMI; 1*DC 12V
Optional	WiFi / Bluetooth / 4G



Mini PC – A1

Main Board	POS Motherboard
CPU	Intel J4125
Memory	4G / 8G / 16G DDR4
Hard Disk	64G / 128G / 256G SSD
Power	12V DC
Interface	6*USB ports; 2*COM ports; 2*LAN ports; 1*HDMI port; 1*VGA port; 1*DC port; 1 Audio port
Optional	WIFI + Bluetooth / 4G



Mini PC – A2

Main Board	POS Motherboard
CPU	Intel J4125
Memory	4G / 8G DDR4
Hard Disk	64G / 128G / 256G / 512G SSD
Power	12~19V DC
Interface	8 USB ports; 2 LAN ports; 2 HDMI ports; 1 SIM card slot 1 Audio input (MIC); 1 Audio output
Optional	WIFI + Bluetooth / 4G



GS-405A



4 Bill Width: 84/87/85/85mm
Bill Length:183mm



GS-405D



High quality spring

- ◆4B8C or 5B8C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆Bill Width: 75/68/69/66/69mm,Bill Length: 183mm
- ◆Coin Width: 80*84*84*81mm,Coin Length: 57mm
- ◆2 Check Slots, 3 Position Lock, 9V / 12V / 24V
- ◆Removable coin tray
- ◆Optional bill and coin compartment
- ◆Size: 405(W)*420(L)*100(H)mm
- ◆Gross weight: 6.5 kgs
- ◆Emergency switch
- ◆Optional: Micro switch

3 position function lock:


- Manual release by key
- Electronic release
- Drawer dead lock function




- ◆4B8C or 5B8C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆Bill Width: 84/87/85/85mm,Bill Length: 183mm
- ◆Coin Width: 80*84*84*81mm,Coin Length: 57mm
- ◆2 Check Slots, 3 Position Lock, 9V / 12V / 24V
- ◆Removable coin tray
- ◆Optional bill and coin compartment
- ◆Size: 405(W)*420(L)*100(H)mm
- ◆Gross weight: 8.0 kg
- ◆Emergency switch
- ◆Optional: Micro switch, Bell



Durable roller

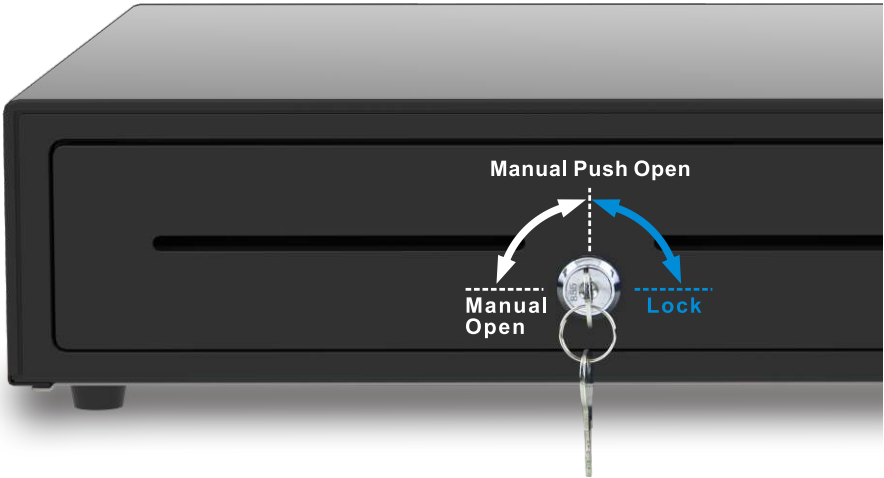

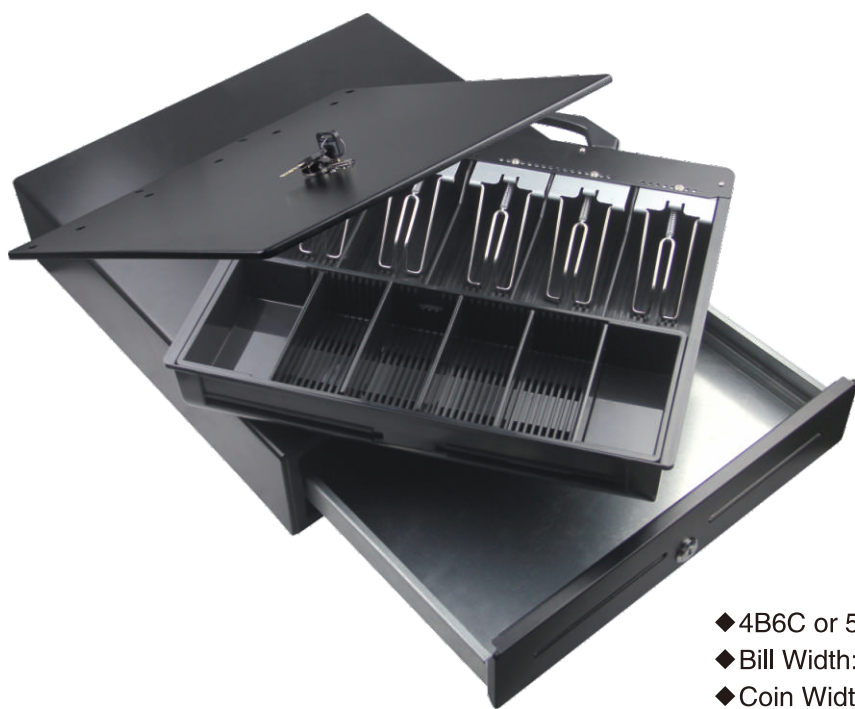

- ◆ 4B6C or 5B4C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots, 3 Position Lock, 9V / 12V / 24V
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Gross weight: 9.0 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch, Bell

GS-405E



- ◆ **Manual Cash Drawer**
- ◆ 4B8C or 5B8C adjustable Cash Drawer
- ◆ Bill Width: 84/87/85/85mm, Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm, Coin Length: 57mm
- ◆ 2 Check Slots
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*420(L)*100(H)mm
- ◆ Gross weight: 6.5 kgs
- ◆ Emergency opener

GS-405H



- ◆ 5B6C/7B4C Cash Drawer(RJ11/RJ12/USB)
- ◆ Bill Width: 83/71/71/71/70mm, Bill Length: 158mm
- ◆ Coin Size: 2/89(W)*66(L)mm, 2/142(W)*66(L)mm, 2/66(W)*134(L)mm
- ◆ 2 Check Slots, 3 Position Lock, 9V / 12V / 24V
- ◆ Size: 410(W)*420(L)*100(H)mm
- ◆ Gross weight: 5.5 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch

GS-410B



- ◆ 4B4C Cash drawer(RJ11/RJ12)
- ◆ 330(W)*360(L)*90(H)MM
- ◆ Bill width: 71/73/73/65mm, bill length: 174mm
- ◆ Coin box : 71/73/73/67mm, coin length: 79mm
- ◆ Net weight: 3.5 kgs, Gross weight: 4.0 kgs
- ◆ 9V / 12V / 24V
- ◆ Emergency switch

GS-330A



Slider type: Ball bearing
Slide for
smooth & stable operation

Heavy-Duty Cash Drawer
Metal Cash Tray

- ◆ 5B5C Cash drawer(RJ11/RJ12/USB)
- ◆ Size:460(W)*460(L)*115(H)mm
- ◆ Bill width:74/86/70/86/76mm,bill length:185mm
- ◆ Coin box :69/85/69/85/74mm,coin length:112mm
- ◆ 9V / 12V / 24V
- ◆ Gross weight: 11.0 kg
- ◆ Emergency switch
- ◆ Optional: Micro switch, Bell

GS-460



- ◆ 4B8C Cash Drawer (RJ11)
- ◆ 230(W)*338(L)*110(H)mm (With feet)
- ◆ Bill width: 78mm Bill length: 175mm
- ◆ Coin width: 40mm , Coin length: 189mm
- ◆ 9V / 12V / 24V
- ◆ Emergency switch
- ◆ Gross Weight: 3.4kg

GS-230



- ◆ Interface:RJ11
- ◆ Lock:2 position lock, Manual Open
- ◆ Bill:The 6 bill depth-83mm, 5 bill (adjustable) length- 180mm,Width-23/17/17/17/29.5,1bill (steady)length- 157mm, width-26mm
- ◆ Coin:8 coin depth-60 ,middle 2 coin length-72mm,width- 55mm. Left 4 coin length- 71mm, width-59mm
- ◆ Check port:1 Check slot
- ◆ Voltage:12V / 24V(option)
- ◆ Size:460(W)X170(D)X100(H)

GS-170



- ◆ 4B8C or 5B8C adjustable Cash Drawer (RJ11/RJ12/USB)
- ◆ Bill Width: 84/87/85/85mm,Bill Length: 183mm
- ◆ Coin Width: 80*84*84*81mm,Coin Length: 57mm
- ◆ 2 Check Slots, 3 Position Lock, 9V / 12V / 24V
- ◆ Removable coin tray
- ◆ Optional bill and coin compartment
- ◆ Size: 405(W)*435(L)*100(H)mm
- ◆ Gross weight: 6.5 kgs
- ◆ Emergency switch
- ◆ Optional: Micro switch

GS-405K



- ◆ Print method: Direct Line Thermal
- ◆ Printer speed: 120mm/s
- ◆ Printing width: 20–80mm
- ◆ Interface: USB/USB+Bluetooth/USB+LAN
- ◆ Diameter of Paper Warehouse: 100mm
- ◆ Power Supply: DC 24V/1.5A

GS-8610 3 inches thermal label printer



- ◆ 80mm paper wide, with auto cutter
- ◆ Printing Speed: 260mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB / LAN / USB+LAN
- ◆ Cash box control: DC 12–24V/1A
- ◆ Power Supply: DC 24V/2.0A

GS-8256 80mm thermal printer




- ◆ Print method: Direct Line Thermal
- ◆ Printer speed: 160mm/s
- ◆ Printing width: 100mm(Max 800 point)
- ◆ Interface: USB/USB+Bluetooth/USB+LAN/WIFI
- ◆ Diameter of paper warehouse: 100mm
- ◆ Power Supply: DC 24V/2.5A

GS-9210 4 inches thermal label printer



- ◆ 80mm paper wide with auto cutter
- ◆ Printing Speed: 220mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB+LAN
- ◆ Power Supply: DC 24V/1.5A
- ◆ Size:141(W)X202(D)X132(H) mm

GS-8370 80mm thermal printer

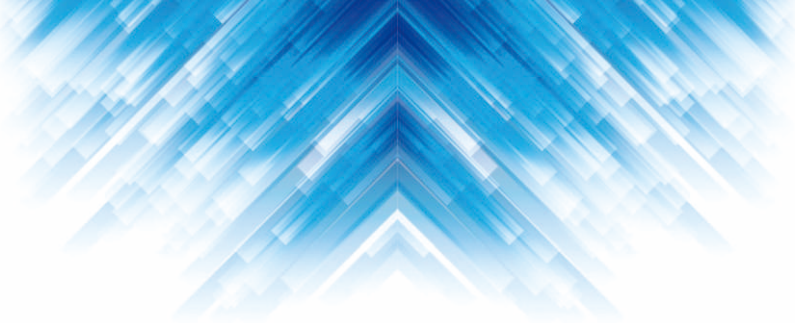

- ◆ 80mm paper wide with auto cutter
- ◆ Printing Speed: 220mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB / USB+LAN
(WIFI, BLUETOOTH OPTIONAL)
- ◆ Cash box control: DC 12–24V/1A
- ◆ Power Supply: DC 24V/1.5A
- ◆ Size: 135(W)X160(D)X122(H) mm

GS-8360 80mm Thermal Printer



- ◆ 58mm Bluetooth Thermal Printer
- ◆ Printing Speed: 60mm/s
- ◆ Reliability: 50km/100 million pulses
- ◆ Interfaces: USB/Bluetooth
- ◆ Power Supply: DC 7.4V/1.5A
- ◆ Supprt Windows(7,8,10)/ Android/IOS

GS-5860 Bluetooth Printer



- ◆ 80mm paper wide with auto cutter
- ◆ Printing Speed: 220mm/s
- ◆ Reliability: 100km
- ◆ Interface: USB+LAN
- ◆ Power Supply: DC 24V/1.5A
- ◆ Size: 141(W)X202(D)X132(H) mm

GS-8258 80mm Thermal Printer



- ◆ 80mm Bluetooth Thermal Printer
- ◆ Printing Speed: 60mm/s
- ◆ Reliability: 50km/100 million pulses
- ◆ Interfaces: USB/Bluetooth
- ◆ Power Supply: External DC 9V/1.5A
- ◆ Bluetooth 4.0 (Iphone; Ipad)
- ◆ Supprt Windows(7,8,10)/ Android/IOS

GS-8060 Bluetooth Printer



GS-2000
76mm dot-matrix printer

- ◆ 76mm dot-matrix printer
- ◆ Printing Speed: 4.5 lines/s
- ◆ Reliability: 10 million lines
- ◆ Interface: USB
- ◆ Cash box control: DC 12-24 V / 1A
- ◆ Power Supply: DC 24V/2.5A



Ribbon



Triplicate



TE-344
Barcode Label Printer



- ◆ Barcode Label Printer
- ◆ Printing Speed: 127mm/s
- ◆ Print width: 105.6mm
- ◆ Print length: 1016mm
- ◆ Reliability: TPH: 1 million inches
- ◆ Interface: RS-232C (max. 115,200 bps)/ USB
RS-232C (max. 115,200 bps)/Centronics
(factory option)
- ◆ Power Supply: Input: AC 100-240V
Output: DC 24V 2.5A



GS-TM30A

- ◆ Electronic barcode printing scale;
- ◆ with inner thermal barcode printer, 76mm/sec, Label Sticker
Size: 40*60mm or 58*30mm ;
- ◆ Max weighing capacity is 6/15/30KGS;
- ◆ Customer display: Green LCD Display (Negative), Tare: 4 digits,
Weight: 5 digits, Unit Price: 6 digits, Total: 7 digits;
- ◆ Interface: LAN+RJ11+USB+Serial ports.
- ◆ Support five windows



GS-9519 2D Wireless Barcode Scanner

- ◆ Wireless 2D Barcode Scanner
- ◆ Image Sensor: 640*480 pixels
- ◆ Resolution (maximum): 4mils
- ◆ Light Source: LED White light
- ◆ Reading Angle: Pitch: 0-360° ; Roll (Tilt): ± 60° ;
Skew (Yaw): ± 60°
- ◆ 2.4G wireless transmission: Open space 100 meters
- ◆ Battery capacity: 2000mAh
- ◆ Interface: USB (receiver stand)



GS-9520SR Wired 2D Barcode Scanner

- ◆ Light Source: LED White light
- ◆ Image sensor: 1280*800 pixels
- ◆ Reading Angle: Pitch: 0-360° ; Roll (Tilt): ± 60° ;
Skew (Yaw): ± 60°
- ◆ Reading Indicators: LED light & Buzzer
(adjustable tone and volume)
- ◆ Resolution (maximum): 4mils
- ◆ Interfaces: RS-232; USB HID; USB COM; HID POS





- ◆ 1D Laser Barcode Scanner
- ◆ scan distance: 10~820mm
- ◆ scanning speed: 100 times/s
- ◆ Interface: ps2/Serial/USB port
- ◆ shockproof & fallproof,
- ◆ Can be with holder

GS-1695 Laser barcode scanner
1.5m Shockproof



- ◆ LED self-induction barcode scanner
- ◆ scan distance: 10~20mm
- ◆ scanning speed: 300times/s
- ◆ Error rate: 1/5 million
- ◆ RS232, USB interface
- ◆ Can read ID barcode on cellphone
- ◆ Wireless optional

T5 CCD barcode scanner



- ◆ 2D Barcode Scanner (can be with holder)
- ◆ Image (Pixels): VGA 640x480 pixels
- ◆ Light Source: Aiming& illumination: 617nm LED
- ◆ Current : 80mA (standby); 300mA (Operating)
- ◆ Voltage : 5VDC
- ◆ Print Contrast: 25% minimum reflective difference
- ◆ Interfaces Supported: USB, RS232
- ◆ Ambient Light Immunity: up to 100,000 Lux.

GS-10T 2D barcode scanner



- ◆ Wireless Laser Barcode Scanner
- ◆ Scan Speed: 200 ± 10 scans/second
- ◆ 50~100 meters distance
- ◆ Memory: 4MBytes, can save over 30000 Barcode
- ◆ Battery: 3.7V/1000mAH, polymer li-ion, can be taken it out easily, continue working for more than 20hours
- ◆ Interface: USB(receiver stand)

GS-1880W Wireless scanner



- ◆ 2D barcode scanner
- ◆ Sensor: CMOS
- ◆ Interface: USB/RS232
- ◆ Reading accuracy: ≥ 5mil

GS-8190



- ◆ Omni-directional CMOS Red Barcode Scanner
- ◆ Interface: USB/Serial
- ◆ Scanning Speed: 200 scan lines per second

GS-A80



GS-A901 1D/2D CMOS Barcode Scanner



- ◆ Decoding Type: 1D & 2D
- ◆ Reading accuracy: 4mils
- ◆ Standby current: < 220mA
- ◆ Working current: < 430mA
- ◆ Interface support: USB COM; RS-232; USB HID; HID POS
- ◆ Input voltage: DC 5V ± 10%
- ◆ Dimension: 153(W)*80(D)*142+26(H)



- ◆ 17" Capacitive Touch Monitor
- ◆ Support HDMI Interface
- ◆ Resolution:1440*900
- ◆ Screen Ratio:16:10
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

GS-1533 17" Touch Monitor



- ◆ 15" Touch Monitor (5 wire-resistive touch)
- ◆ Resolution:1024*768
- ◆ Screen Ratio:4:3
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

GS-1530II 15" Touch Monitor



- ◆ 15.6" Capacitive Touch Monitor
- ◆ Support HDMI Interface
- ◆ Resolution:1366*768
- ◆ Screen Ratio:16:9
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

GS-1531 15.6" Touch Monitor



- ◆ 15.6" Capacitive Touch Monitor
- ◆ Support HDMI Interface
- ◆ Resolution:1366*768
- ◆ Screen Ratio:16:9
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC

GS-1532 15.6" Touch Monitor



GS-1535 15" Touch Monitor




- ◆ 15" Capacitive Touch Monitor
- ◆ Resolution:1024*768
- ◆ Screen Ratio:4:3
- ◆ Input Power:12V,3.0A
- ◆ Input Interfaces:VGA, DC



GS-1534 17" Touch Monitor



- ◆ 17" Capacitive Touch Monitor
- ◆ Support HDMI Interface
- ◆ Resolution:1280*1024
- ◆ Screen Ratio:4:3
- ◆ Input Power:12V,5.0A
- ◆ Input Interfaces:VGA, DC

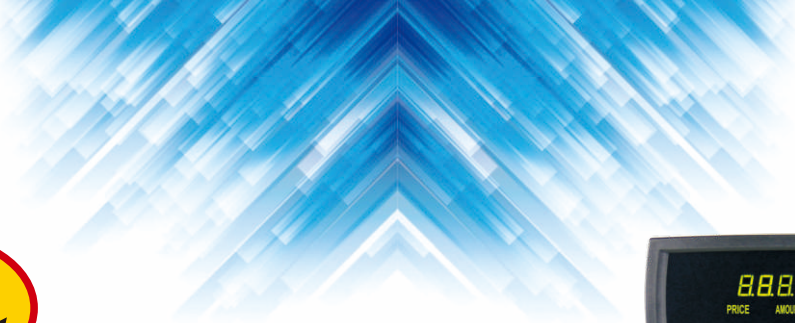

- ◆ 8 digits customer display,with pole and stand
- ◆ Interface:Serial +USB; Power supply: USB Port; Communication interface: Serial Port.
- ◆ With pole and stand

GS-LED8N



- ◆ 40 (2 lines * 20 columns) Vacuum fluorescent display
- ◆ Interface: USB+PS/2 or USB
- ◆ 5V / 12V
- ◆ 226 (W) x 45 (D) x 85 (H) mm
- ◆ Power Supply: USB & Serial port or USB only
- ◆ With pole and stand

GS-210CE VFD



- ◆ Display Method: TFT-LCD Display
- ◆ Resolution: 800*480/ 1024*600/1024*768
- ◆ Interface: USB

LCD 5" / 7" / 8" / 9.7"



Smart Card Reader



GS-KB78
Programmable keyboard

- ◆ Programmable keyboard for major shopping malls POS system, according to user requirements can be assembled of different keys
- ◆ Available in a range of caps: bond one time, bond two times, bond four times, number keys
- ◆ Provide detailed programming procedure, users can easily define each key
- ◆ A 8 times lock with the electronic mandate concerts to the use of different levels, setting different functional requirements
- ◆ Can be installed magnetic card reader



GS-KB105F
POS keyboard

- ◆ Using ordinary computer standard keyboard arrangement
- ◆ Using the high strength membrane keys with over 10 million times working life
- ◆ Using laser engraving technology on the Key caps to make characters clear and wearproof
- ◆ Good quality and performance POS Keyboard
- ◆ Fashion and elegant appearance



GS-KB81
POS keyboard

- ◆ 81 keys Programmable keyboard with magcard reader track 2+3,
- ◆ Interface: ps/2 or USB
- ◆ Dimension:390*155*42 mm
- ◆ Key Lifetime:Over 1 Million times
- ◆ Reding Speed:10–120cm/s
- ◆ Head life:>500000 times
- ◆ Power Supply:DC+3.3V



58/80mm Thermal Paper